
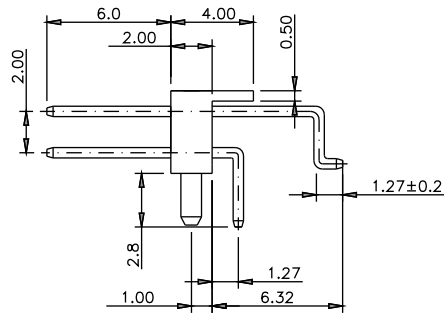
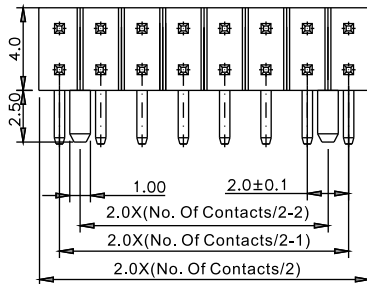


■ Specifications

Current rating:2.0AAC/DC
Voltage rating:125V AC/DC
Contact resistance:20m ohm. max.
Insulation resistance:1000M ohm. Min. At 100V DC
Withstanding voltage:500V AC for one minute
Operating temperature range:-40°C to +105°C

■ Material and Finish

Insulator:High Temp. Plastic(UL94V-0)
Contact:Copper Alloy
Plating:Gold Plated

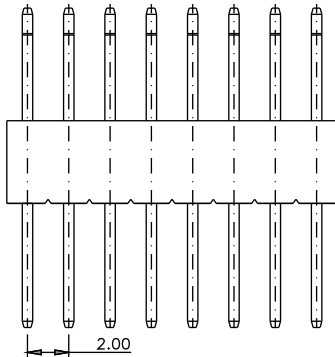


■ Ordering Information

2208R-XXG-A60632-CH

① ② ③ ④

① R:Right Angle Type	② No. Of Contacts	④ Tape & Reel
	③ G:Gold Plated	

■ Recommended PCB Layout

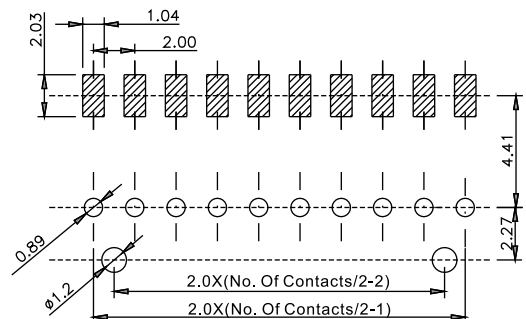

Unit:mm