


■ **Specifications**



- Current rating:2.0AAC/DC
- Voltage rating:125V AC/DC
- Contact resistance:20m ohm. max.
- Insulation resistance:1000M ohm. Min.
- Withstanding voltage:500V AC for one minute
- Operating temperature range:-40°C to +105°C

■ **Material and Finish**


- Insulator:High Temp. Plastic(UL94V-0)
- Contact:Copper Alloy
- Plating:Gold/Tin Plated



A=2.8, B=1.1, C=4.0
P/N:2208R-XXG
Standard Type

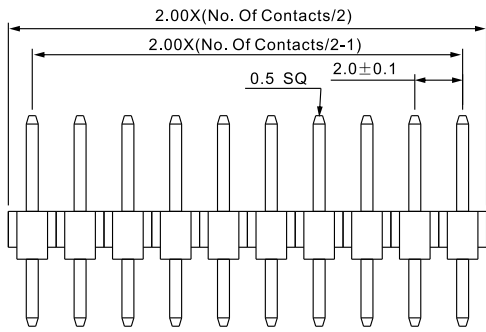

A=2.8, B=4.0, C=8.8
P/N:2208S-XXG
Standard Type

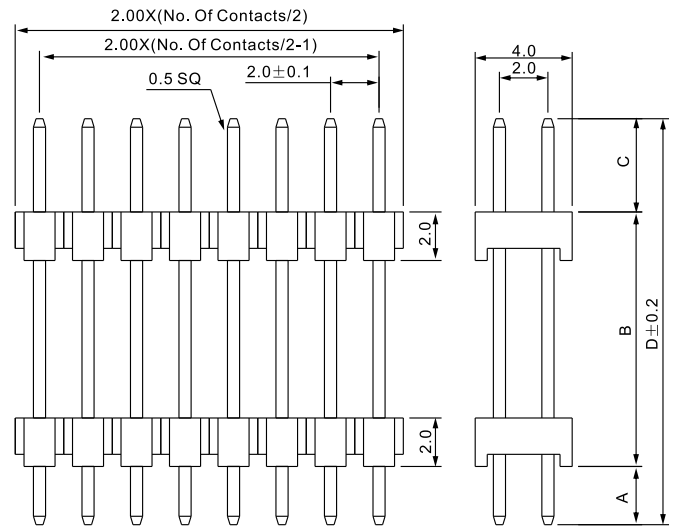

A/B/C Dimension Will Be Advise By Value Customers

■ **Ordering Information**


2208S—XXG—XXXX

① S: Straight R: Right Angle	② No. Of Contacts ③ G: Gold Plated	④ Blank Standard Type XXXX: Special Length Part No.
---------------------------------	---------------------------------------	---

2208DI—XXG—XXXX

① Double Insulator	② No. Of Contacts ③ G: Gold, T: Tin	④ XXXX: Special Length Part No. (Dim D)
--------------------	--	--

■ **Recommended PCB Layout**

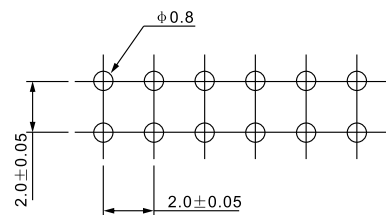

Unit:mm