



■ **Specifications**


Current rating:3.0AAC/DC
Voltage rating:250V AC/DC
Contact resistance:20m ohm. max.
Insulation resistance:1000M ohm. Min.
Withstanding voltage:600V AC for one minute
Operating temperature range:-40°C to +105°C

■ **Material and Finish**

Insulator:High Temp. Plastic(UL94V-0)
Contact:Copper Alloy
Plating:Gold/Tin Plated

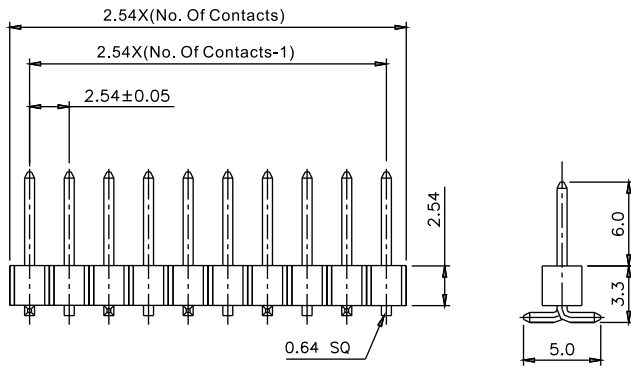

P/N:2211SM-XXG-B2



P/N:2211SM-XXG-B1


■ **Ordering Information**

2211SM-XXG-BX-XXXX


① ② ③ ④ ⑤

① SM:SMD Type	② No. Of Contacts ③ G:Gold Plated T: Tin Plated	④ B1:B1 Type B2:B2 Type
⑤ Blank Standard Type XXXX:Special Length Of Part No.		

■ **Recommended PCB Layout**



P/N:2211SM-XXG-B1



P/N:2211SM-XXG-B2

Unit:mm