


Specifications


- Current rating: 3.0AAC/DC
- Voltage rating: 250V AC/DC
- Contact resistance: 20m ohm. max.
- Insulation resistance: 1000M ohm. Min.
- Withstanding voltage: 600V AC for one minute
- Operating temperature range: -40°C to +105°C

Material and Finish



- Insulator: High Temp. Plastic (UL94V-0)
- Contact: Phosphor Bronze
- Plating: Gold Plated

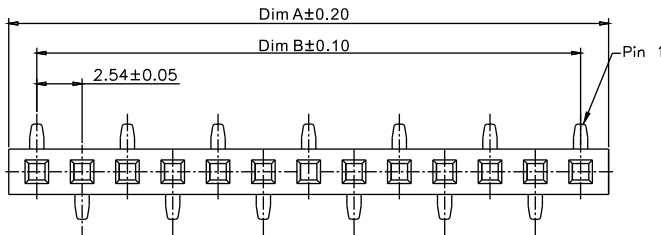

P/N: 2212TB-XXG-B1

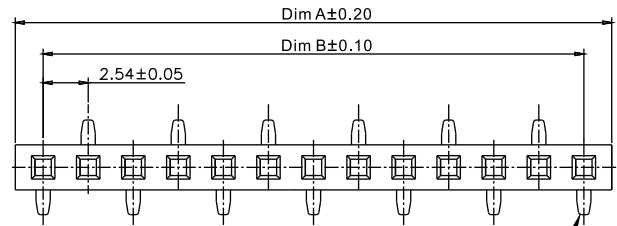


P/N: 2212TB-XXG-B2

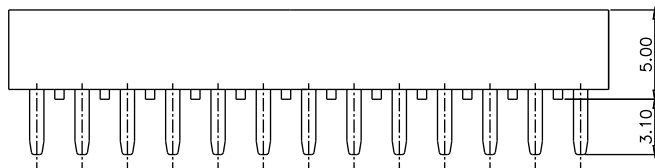


Engineering Dimension

Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B
2	5.68	2.54	15	38.70	35.56	28	71.72	68.58
3	8.22	5.08	16	41.24	38.10	29	74.26	71.12
4	10.76	7.62	17	43.78	40.64	30	76.80	73.66
5	13.30	10.16	18	46.32	43.18	31	79.34	76.20
6	15.84	12.70	19	48.86	45.72	32	81.88	78.74
7	18.38	15.24	20	51.40	48.26	33	84.42	81.28
8	20.92	17.78	21	53.94	50.80	34	86.96	83.82
9	23.46	20.32	22	56.48	53.34	35	89.50	86.36
10	26.00	22.86	23	59.02	55.88	36	92.04	88.90
11	28.54	25.40	24	61.56	58.42	37	94.58	91.44
12	31.08	27.94	25	64.10	60.96	38	97.12	93.98
13	33.62	30.48	26	66.64	63.50	39	99.66	96.52
14	36.16	33.02	27	69.18	66.04	40	102.20	99.06

Recommended PCB Layout

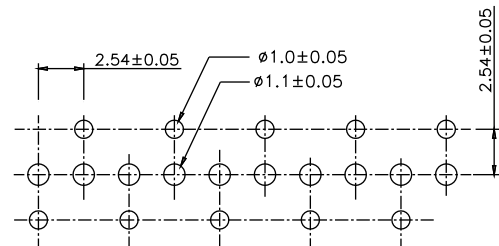

P/N: 2212TB-XXG-B1

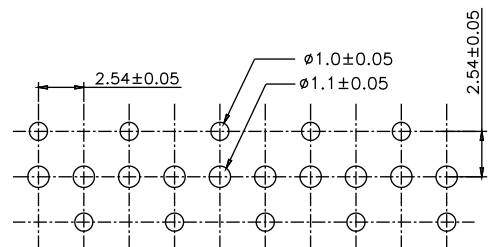

P/N: 2212TB-XXG-B2

Ordering Information

2212TB-XXG-BX

① ② ③ ④

① TB: Bottom Entry	② No. Of Contacts	④ B1 Type B2 Type
	③ G: Gold Plated	

Unit:mm