


■ **Specifications**


Current rating:3.0AAC/DC
Voltage rating:250V AC/DC
Contact resistance:20m ohm. max.
Insulation resistance:1000M ohm. Min.
Withstanding voltage:600V AC for one minute
Operating temperature range:-40°C to +105°C

■ **Material and Finish**


Insulator:High Temp. Plastic(UL94V-0)
Contact:Phosphor Bronze
Plating:Gold Plated

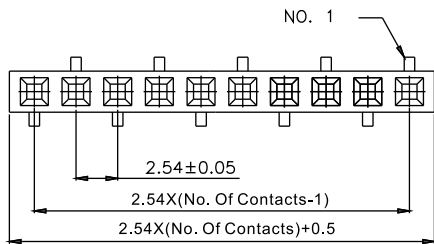


P/N:2212SM-XXG-75-B2

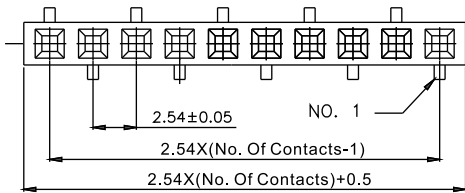

P/N:2212SM-XXG-75-B1

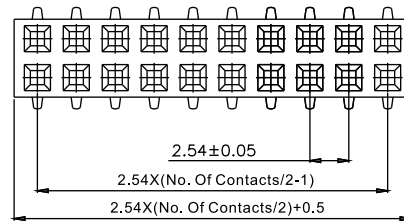

P/N:2214SM-XXG-75

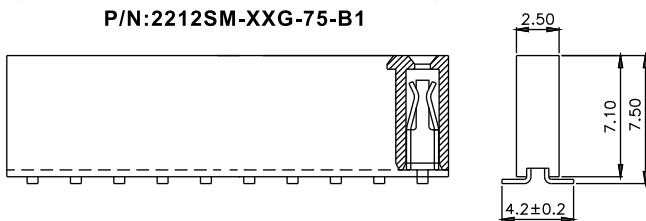


■ **Ordering Information**

2212SM-XXG-75-BX

① ② ③ ④

① SM:SMD Type	② No. of Contacts	④ B1:B1 Type B2:B2 Type
	③ G:Gold Plated	

■ **Recommended PCB Layout**

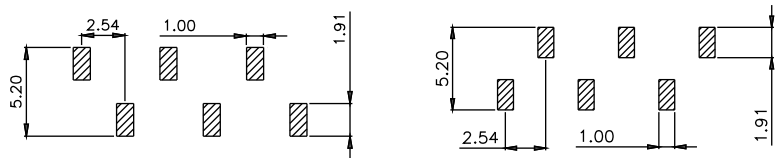


P/N:2212SM-XXG-75-B1

P/N:2212SM-XXG-75-B2

2214SM-XXG-75

① ② ③ ④

① SM:SMD Type	② No. Of Contacts	④ Height
	③ G:Gold Plated	

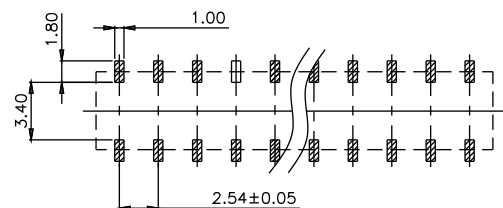

P/N:2214SM-XXG-75

Unit:mm