


■ **Specifications**


Current rating:3.0AAC/DC  
Voltage rating:250V AC/DC  
Contact resistance:20m ohm. max.  
Insulation resistance:1000M ohm. Min.  
Withstanding voltage:600V AC for one minute  
Operating temperature range:-40°C to +105°C

■ **Material and Finish**



Insulator:High Temp. Plastic(UL94V-0)  
Contact:Phosphor Bronze  
Plating:Gold Plated

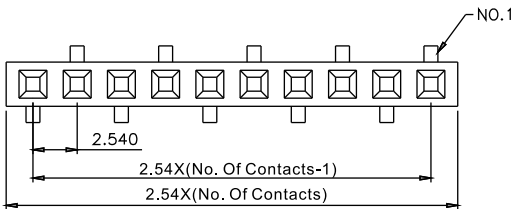


P/N:2212SM-XXG-50-B2

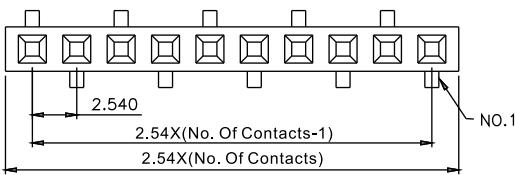

P/N:2212SM-XXG-50-B1

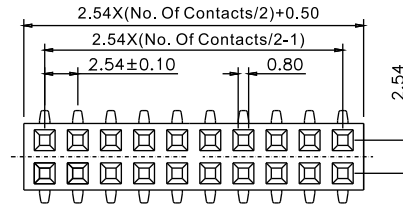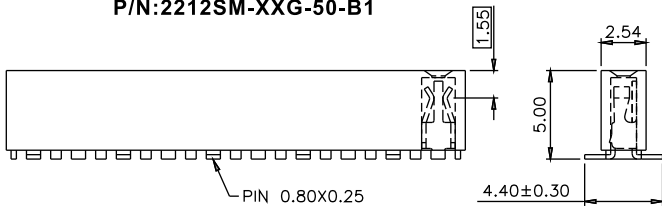

P/N:2214SM-XXG-50

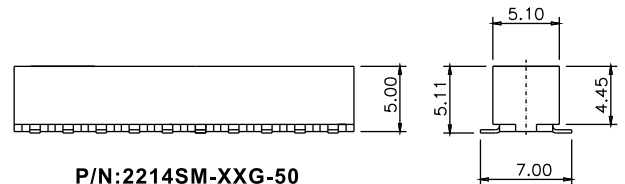

■ **Ordering Information**

**2212SM-XXG-50-BX**

① ② ③ ④


① SM:SMD	② No. of Contacts	③ G:Gold Plated	④ B1:B1 Type B2:B2 Type
----------	-------------------	-----------------	----------------------------

**2214SM-XXG-50**

① ② ③


① SM:SMD Type	② No. Of Contacts	③ G:Gold Plated
---------------	-------------------	-----------------

■ **Recommended PCB Layout**

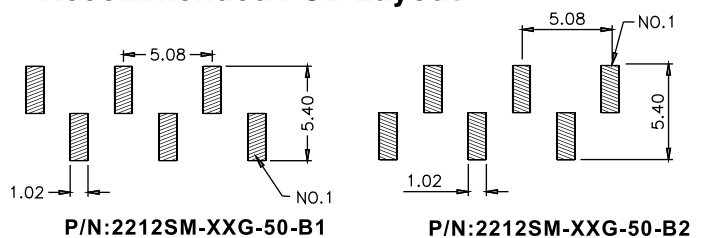

P/N:2212SM-XXG-50-B1

P/N:2212SM-XXG-50-B2

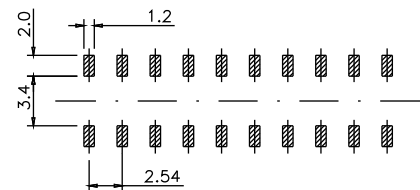

P/N:2214SM-XXG-50

Unit:mm