
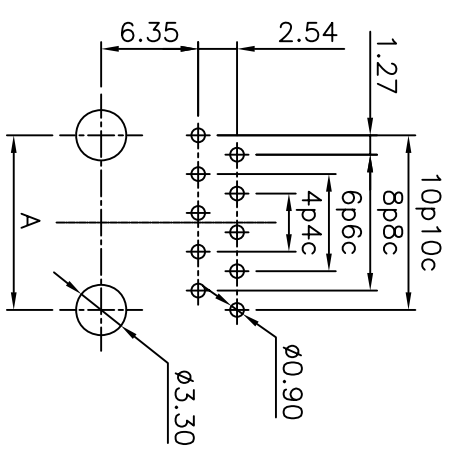


Specifications:  
 Current rating: 1.5A AC/DC  
 Voltage rating: 125V AC/DC  
 Contact resistance: 20m ohm. max.  
 Insulation resistance: 500M ohm. Min.  
 Withstanding voltage: 1,000V AC for one minute  
 Operating temperature range: -40°C to +85°C  
 Material and Finish:  
 Insulator: High Temp. Plastic (UL94V-0)  
 Contact: Phosphor Bronze  
 Plating: Selective Gold Plated  
 How To Order  
 7290-XPXC-01-F1

Lead Free  
 W/O Flange  
 No. Of Contacts  
 No. Of Positions

POSITION	CONTACT	A	B	C
4P	4C	7.62	11.20	7.95
6P	2C/4C/6C	10.16	13.20	10.00
8P	8C	11.43	15.00	12.00
10P	10C	11.43	15.00	12.00



P.C.B. Layout (Bottom View)

RoHS Compliant

F								
E								
D								
C								
B								
A	12-Apr-2006	(P0041)	Cel King					
REV	DATE	FILE	BY					

GENERAL TOLERANCE:  
 .X = ±0.20  
 .XX = ±0.15

UNIT: MM  
 SCALE: 1:1  
 SHEET: 1 / 1  
 PROJECTION:

DESCRIPTION: PCB JACK, SIDE ENTRY

PART NO: 7290-XPXC-01-F1

SIZE: **A4**

繼德工業股份有限公司  
**Neltron Industrial Co., Ltd.**

DRAWN: Jerry Chen  
 CHECKED: Jeremy Liu  
 APPROVAL: Mike Wu