


Pitch: 5.00mm(0.197inch)




## SPECIFICATIONS


			CUL	VDE
負載電壓	Rated Voltage	Bemessungsspannung	AC 300V	AC 450V
負載電流	Rated Current	Bemessungsstrom	16A	16A
電線線徑	Wire Size	Leitergrößen	26~12AWG	0.2~2.5mm <sup>2</sup>
塑膠本體	Housing Material	Isolierstofftyp	Polyamide66(UL94V-0)	
押線圈	Cage Clamp	Klemmkörper	Brass, Ni plated	
端子	Terminal	Stiftmaterial	Brass, Tin plated	
螺絲	Screw Size	Schraubengewinde	M2.6, steel, Ni plated	
操作溫度	Operating Temperature	Umgebungstemperatur	-40°C to + 105°C	
扭力	Torque	Anzugsmoment	5.0 lb-inch	
PC板孔徑	PCB Hole Diameter	Lochdurchmesser	φ 1.5mm	
UL File No.	E167040			

## TABLE

Item No.	A(mm)	A(inch)
MB322-500M02	10.0	0.394
MB322-500M03	15.0	0.591

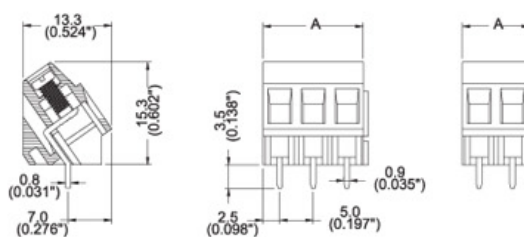

## PCB Layout



### Note:

Screw Plating: Changes are available upon request

Cage Clamp: MB 320: Steel

MB 321: Zinc