






Clamp Spring - Spring type terminal blocks / WK&SC series

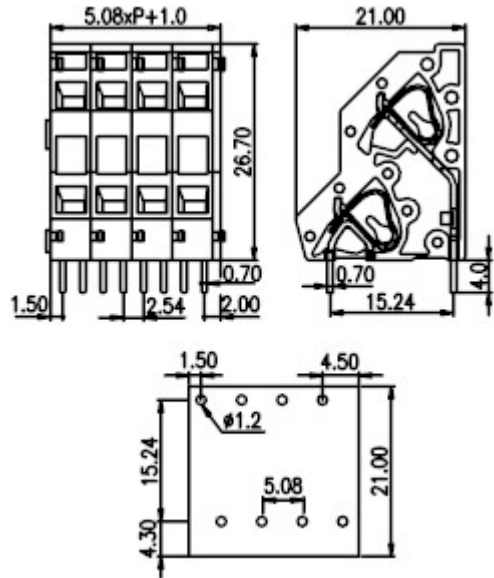

WKK508

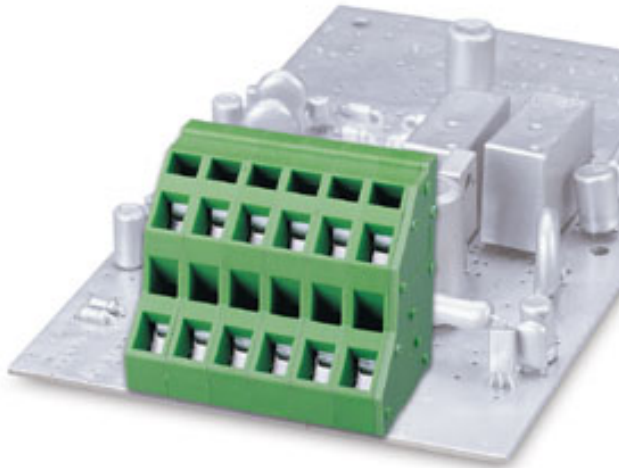







Pitch: 5.08mm

Approval	  	
Technical Data	UL	IEC
Rated voltage	300V	450V
Rated current	15A	24A
Wire range	2.5mm ²	
Solid wire (AWG)	28-12	
Stranded wire (AWG/mm ²)	28-12	
Rated surge voltage (UL/IEC/Max.)	1.6 / 2.5 / 4 KV	
Wire strip length	6~7mm	
Single Pole	Cat. No.	
	WKK508-02X	
End Cover	WKK500C	
Optional color	Cat. No.	
●	WKK508-02X	
●	WKK508-02X-GN	
●	WKK508-02X-RD	
●	WKK508-02X-BL	
●	WKK508-02X-BK	
●	WKK508-02X-OR	



Pole	Cat. No.
04	WKK508-04P
06	WKK508-06P
08	WKK508-08P
10	WKK508-10P
12	WKK508-12P
14	WKK508-14P
16	WKK508-16P
18	WKK508-18P
20	WKK508-20P
22	WKK508-22P
24	WKK508-24P
-	--
-	--

Optional color	Cat. No.
	WKK508-XXP
	WKK508-XXP-GN
	WKK508-XXP-RD
	WKK508-XXP-BL
	WKK508-XXP-BK
	WKK508-XXP-OR

TEL: +886-2-2908-0614

FAX: +886-2-2908-8549

E-mail: infor@dinkle.com.tw