
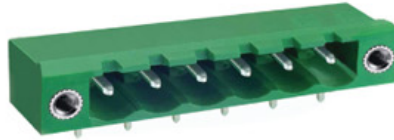


# ME 050-508 Header with flanges

Pitch: 5.08mm(0.200inch)





## SPECIFICATIONS

			CUL	VDE
負載電壓	Rated Voltage	Bemessungsspannung	AC 300V	AC 400V
負載電流	Rated Current	Bemessungsstrom	16A	16A
塑膠本體	Housing Material	Isolierstofftyp	Polyamide66(UL94V-0)	
焊針	Solder Pin	Lötstift	□ 1.0mm, Brass, Tin plated	
操作溫度	Operating Temperature	Umgebungstemperatur	-40°C to + 105°C	
PC板孔徑	PCB Hole Diameter	Lochdurchmesser	φ1.5mm	
UL File No.	E167040			

TABLE

Item No.	A(mm)	A(inch)
ME050-50802	20.3	0.800
ME050-50803	25.4	1.000
ME050-50804	30.5	1.200
ME050-50805	35.6	1.400
ME050-50806	40.6	1.600
ME050-50807	45.7	1.800
ME050-50808	50.8	2.000
ME050-50809	55.9	2.200
ME050-50810	61.0	2.400
ME050-50811	66.0	2.600
ME050-50812	71.1	2.800
ME050-50813	76.2	3.000
ME050-50814	81.3	3.200
ME050-50815	86.4	3.400
ME050-50816	91.4	3.600
ME050-50817	96.5	3.800
ME050-50818	101.6	4.000
ME050-50819	106.7	4.200
ME050-50820	111.8	4.400
ME050-50821	116.8	4.600
ME050-50822	121.9	4.800



PCB Layout

