

MPU-320 Series

Single Output 320W Power Factor Corrected AC/DC Power Supplies



Key Features:

- Small 320W Supply
- PFC to EN 61000-3-2 "D"
- EN 60950 Approved (UL)
- CE Certified
- FCC Class B Emissions
- Universal AC Input
- Compact 6" x 4" x 1.5" Size



MicroPower Direct

292 Page Street
Suite D
Stoughton, MA 02072
USA

T: (781) 344-8226
F: (781) 344-8481
E: sales@micropowerdirect.com
W: www.micropowerdirect.com



Electrical Specifications

Specifications typical @ +25°C, nominal input voltage & rated output current, unless otherwise noted. Specifications subject to change without notice.

Input

Parameter	Conditions	Min.	Typ.	Max.	Units
Input Voltage Range	Universal	90		264	VAC
Input Frequency		47		63	Hz
Input Current, Full Load	90 VAC		6		A
Inrush Current, Cold Start	110 VAC			35	A
	220 VAC			70	
Leakage Current	240 VAC		3.5		mA
Power Factor Correction	Meets EN 61000-3-2 Class D				
Input Protection	T6A/250V Fuse				

Output

Parameter	Conditions	Min.	Typ.	Max.	Units
Output Voltage Adjustment	By Trim Pot		±5.0		%
Output Regulation, See Note 1			±1.0		%
Hold Time	120 VAC, 80% Load	16			mSec
Ripple & Noise (20 MHz) See Note 2	See Model Selection Guide				
Overload Protection	Foldback Circuit, Autorecovery	110		140	%
Over Voltage Protection	>130% of Rated Output Voltage. Recycle AC Input.				
Over Temperature Protection	Autorecovery		+110		°C
Temperature Coefficient			±0.04		%/°C
Transient Recovery Time, See Note 4	50% Load Change		2.5		mS
Transient Response Deviation			5		%
Overshoot/Undershoot	At Turn On/Off			±5.0	%
Turn On Delay	120 VAC			1	S
Output Short Circuit	Continuous With Autorecovery				

General

Parameter	Conditions	Min.	Typ.	Max.	Units
Isolation Voltage, See Note 5	Input - Output	3,000			VAC
	Input - FG (Frame Ground)	1,500			
	Primary - Core	1,500			
Switching Frequency	Fixed		23		kHz

Interface Signals

Power Supply On	Green LED on the PCB
Fan Fail	An open collector output rated for 15V/5 mA sink current maximum. Goes high if a fan failure is detected
Power Good Signal	Goes TTL high 100 to 500 mS after regulation. Goes low at least 1 mS before the loss of regulation. Will sink 100 mA.
Remote On/Off	A TTL low signal inhibits the output. Hiccup mode.

Environmental

Parameter	Conditions	Min.	Typ.	Max.	Units
Operating Temperature Range	Ambient	0	+25	+70	°C
Output Derating	2.5%/°C from +50 °C to +70 °C				
Storage Temperature Range		-20		+85	°C
Cooling	See Model Selection Guide				
Operating Humidity	RH, Non-condensing			90	%

Reliability Specifications

Parameter	Conditions	Min.	Typ.	Max.	Units
MTBF	MIL HDBK 217F, 30°C, Gnd Benign	100			kHours
Safety Standards	UL 60950, EN 60950				
EEMI Compliance	Compliance to EN 55022 (CISPR22) Class B; EN 61000-3-2,3				
EMS Immunity Compliance	EN 6100-4-2,3,4,5,6,8,11; EN 55024; CE Marked (LVD)				
Vibration	Sinusoidal 5-50 Hz, Acceleration ±7.35 m/s ² on X, Y & Z Axis				

www.micropowerdirect.com

Model Number	Output Voltage (VDC)		Output Current W/ 28.5 CFM (Max A)	Max. Output Power (W)	Ripple & Noise (% p-p)	Efficiency (%)
	PreSet	Range				
MPU-320S-12YZ	12 VDC	10.0 - 13.8	26.66	320	±1%	83%
MPU-320S-24YZ	24 VDC	21.0 - 26.0	13.33	320	±1%	83%
MPU-320S-48YZ	48 VDC	43.0 - 50.0	6.66	320	±1%	83%

Model Number

MPU-320S-XYZ

Mechanical Config. U = U-Chassis
 Outputs S = Single
 Output Voltage Selection
 Connector Type T = Terminal Block A = Molex
 Case Options (if Available) C = Cover

Notes:

- Output regulation includes line & load.
- Ripple & noise is measured from 10 Hz to 20 MHz. Connection to the unit is made with a 0.1 µF ceramic capacitor and a 22 µF electrolytic capacitor connected in parallel.
- A 1% minimum load is required to maintain regulation and ripple specifications.
- Transient recovery is measured to within a 1% error band for a load step of 50% to 100%.
- Isolation specifications are production HI-Pot tested for 3 seconds.
- The full output range (see table) is covered in the safety agency certification. Standard models are factory set to the Preset voltage, but may be set to other levels within the range without affecting the agency certification. For more information, contact the factory.
- Output power is given for the factory preset voltage. The maximum continuous output power level is 180W without providing 28.5 CFM airflow. All models provide a peak power level of 700W for a maximum duration of 500 µs. For more information, contact the factory. For more information, contact the factory.
- Each unit includes an input fuse (16A/250V). Since this fuse is not field replaceable, it is recommended that an external fuse of the same size be used on the input of the power supply for protection.

Models with other output voltage levels are available (i.e. 5 VDC, 36 VDC, etc)
 Contact the factory for details at:
sales@micropowerdirect.com

Connections

Input/Output Connector (CN1):

- Terminal Block: Howder No. HB-95-7P
7 pins, M3.5 Screw, 9.5 mm Centers
- JST Mating Part No: VHR5N or equivalent (two pins removed)
VHR10N
Crimp Terminals: SVH41T-P1.1

Pin	T Block	Pin	JST
1	+Vout	1	+Vout
2	+Vout	2	+Vout
3	-Vout	3	+Vout
4	-Vout	4	+Vout
5	Field Grnd	5	+Vout
6	AC-Neutral	6	-Vout
7	AC-Line	7	-Vout
		8	-Vout
		9	-Vout
		10	-Vout

Logic Signal Connector (CN2):

- JST Mating Part No: XHP-4 or equivalent
- Mating Pins: JST SXH-002T-P0.6
For AWG 30 to 26




Pin	Function
1	Remote On/Off
2	Fan Fail
3	Common
4	Power Good

Fan Driver Connector (CN3):


- JSTMating Part No: JST XHP-2 or equivalent
- Mating Pins: JST SXH-002T-P0.6

Pin	Function
1	Plus
2	Minus

Mechanical Dimensions (Shown With Terminal Strip)

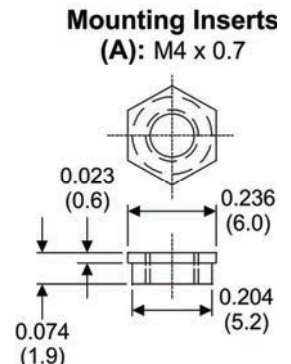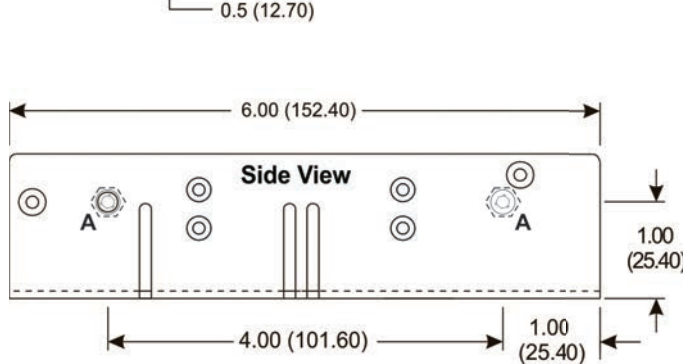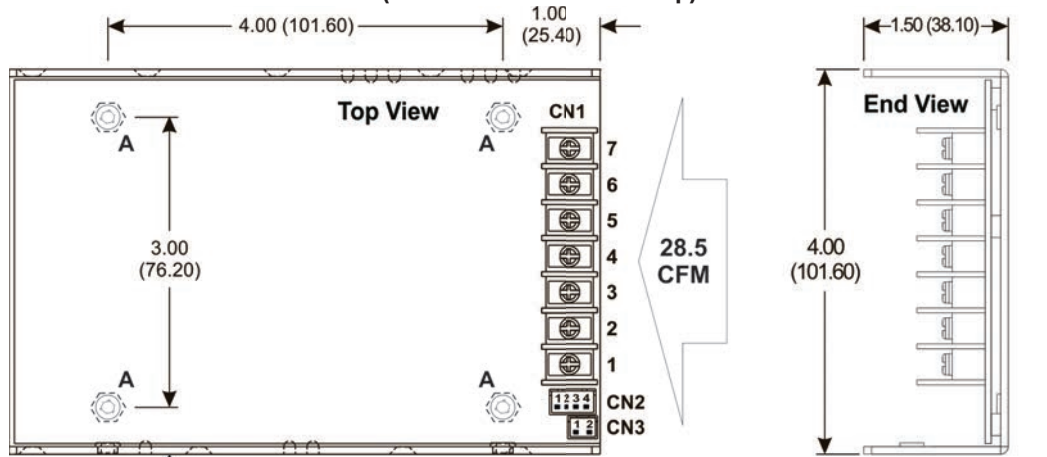

U-Chassis Cover (C Suffix, Shown With JST Connector)

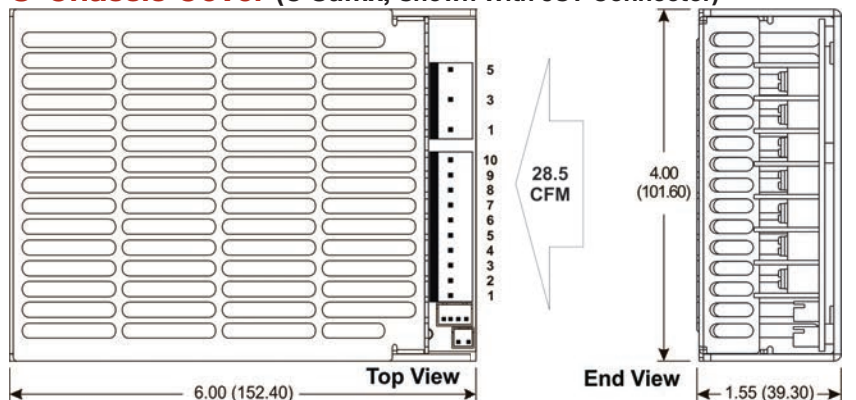

Notes:

- All dimensions are typical in inches (mm)
- Tolerance x.xx = ±0.02 (±0.50)