



Dimensions in mm

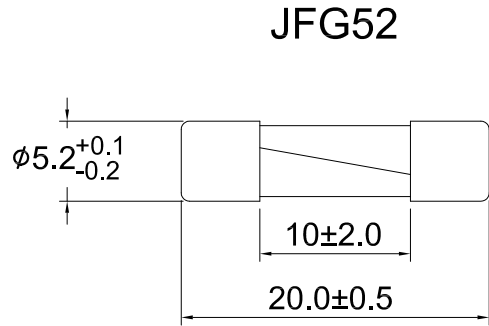


JFG52

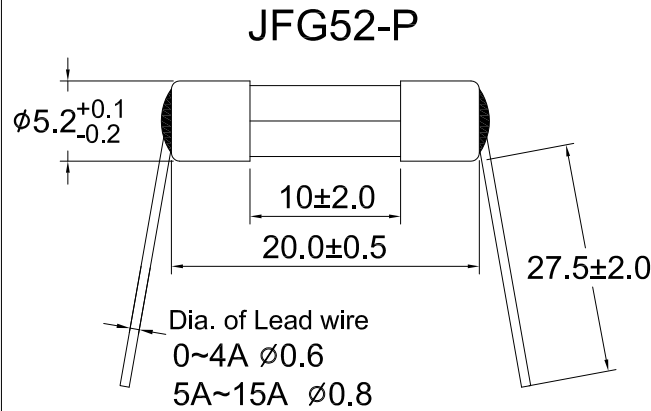


JFG52-P

JFG52-PA

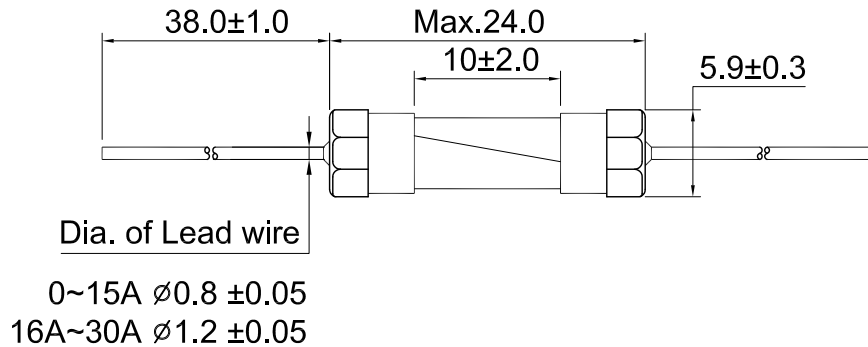

JFG52-PR

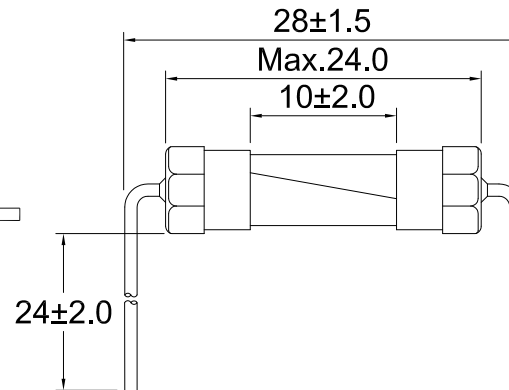

Rated Current	Breaking capacity	Rated Voltage	JFG52-P/PR/PA JET	
0.1A		125V/250V		
0.125A		125V/250V		
0.16A		125V/250V		
0.2A		125V/250V		
0.25A		125V/250V		
0.3A		125V/250V		
0.315A		125V/250V		
0.4A		125V/250V		
0.5A		125V/250V		
0.6A		125V/250V		
0.63A		125V/250V		
0.7A		125V/250V		
0.8A		125V/250V		
1A		@125V/AC 100A	125V/250V	○
1.25A		@250V/AC 100A	125V/250V	○
1.5A			125V/250V	○
1.6A	125V/250V		○	
2A	125V/250V		○	
2.5A	125V/250V		○	
3A	125V/250V		○	
3.15A	125V/250V		○	
3.5A	125V/250V		○	
4A	125V/250V		○	
5A	125V/250V		○	
6A	125V/250V		○	
6.3A	125V/250V		○	
7A	125V/250V		○	
8A	125V/250V		○	
10A	125V/250V	○		
12A	125V/250V	○		
13A	125V/250V	○		
15A	125V/250V	○		
16A	@250V/AC 300A	250V	○	
20A		250V	○	
25A		250V	○	
30A		250V	○	

Test standards according to
JIS C6575-2: J-1/J-2 B Type 1999
Electrical Characteristic



Rated Current	1.3 I _n	1.6 I _n	2 I _n
I _n	Min.	Max.	Max.
0.1A~30A	90 min	60 min	2 min

<small>UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN mm TOLERANCE DECIMALS ANGULAR X ± 0.5 ± 2° XX ± 0.25 DO NOT SCALE DRAWING</small>	CUSTOMER NO.	JENN FENG ELECTRIC INDUSTRIAL CO., LTD. TITLE 5.2X20mm Miniature Cartridge Fuse PART NO. JFG52 JFG52-P/PA/PR DRAWING NO. AA10081706
	DRAWN BY Jason	
	CHECKED BY	
	APPROVED BY 鄭文和	
P/N	DATE 2014.2.21	
REV D	SCALE	